


OUTLET CONNECTION PLATE

OUTLET CONNECTION PLATE FOR DOWNDRAFT TABLE

Outlet connection plate for duct connection of a downdraft table. The plate is to be mounted at the outlet of the downdraft table instead of the outlet panel.


Suitable for mounting of a flange Ø 315 mm or Ø 12 inch for hose or duct connection; flange to be sourced locally.

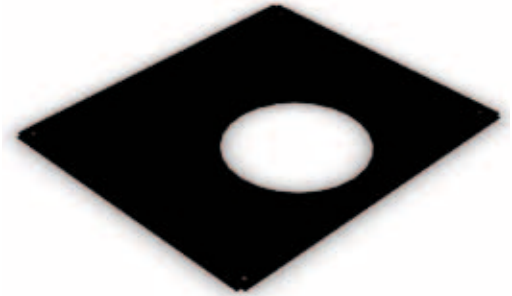

SPECIFICATIONS

■ Physical dimensions and properties	
Material	powder-coated steel
Colour	black RAL 9005
Weight (net)	11 kg (24.3 lbs)
■ Pressure drop	
Max. allowed pressure drop of connected ductwork	<ul style="list-style-type: none"> • downdraft table 50 Hz: 150 Pa (0.6 in. WG) • downdraft table 60 Hz: 250 Pa (1.0 in. WG)
■ Product combinations	
DraftMax Basic	downdraft table with disposable filter
DraftMax Advance	downdraft table with manual self-cleaning filter
DraftMax Ultra	downdraft table with automatic self-cleaning filter
■ Scope of supply	
Outlet connection plate - 3 m (10 ft) PVC sealing	
■ Order information	
Article number	0040100020
Number/package	1
■ Shipping data	
Gross weight	11,2 kg (24.7 lbs)
Packing dimensions	765 x 685 x 15 mm (30.1 x 27.0 x 0.6 in.)
Harmonized Tariff Code	8421.39.2090
Country of origin	the Netherlands

DIMENSIONS

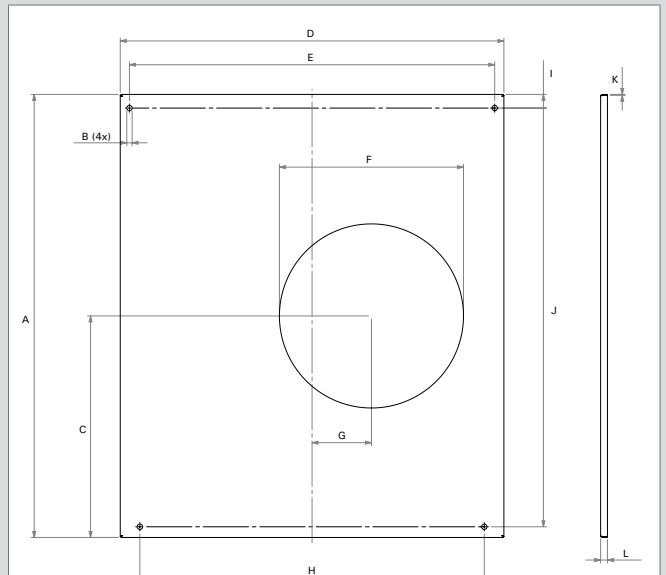

	mm	inch		mm	inch
A	746	29.4	G	100	3.9
B	Ø 9	Ø 0.35	H	580	22.8
C	373	14.7	I	23	0.91
D	646	25.4	J	705	27.8
E	615	24.2	K	1,5	0.06
F	Ø 310	Ø 12.2	L	11,5	0.45

Product type

Outlet connection plate

Article no.

0040100020

Product category

options and accessories

Version

020312/C

Always check the latest version on www.plymovent.com.