

LIGHTING FIXTURE

LIGHT BOX FOR FLEXHOOD

Shock resistant lighting fixture to be mounted inside the modular extraction hood. Suitable for 2 x 36 W fluorescent lights T8 (not included).

The lighting fixture features a UV stabilized diffuser to optimise light output and minimise glare. The diffuser can be opened from either side to allow easy access to lamps and starters for maintenance.




SPECIFICATIONS

■ Physical dimensions and properties	
Material:	<ul style="list-style-type: none"> body + diffuser back plate sealing clips mounting clips
	<ul style="list-style-type: none"> injected polycarbonate sheet steel 0.6 mm stainless steel polyamide
Colour	grey RAL 7035
Weight (net)	3 kg (6.6 lbs)
■ Electrical data	
Power consumption	2 x 36 W
Connection voltage	230V/50Hz
Protection class	IP 65
Wiring	5 x 2,5 mm ²
Mains cord	not included
■ performance	
LOR (Light Output Ratio)	66%
UTE (Union Technique de l'électricité)	0.59G+0.07T
DDF (Direct Flux Factor)	90%
■ Product combinations	
FlexHood	modular extraction hood
■ Scope of supply	
Lighting fixture - Mounting material - Mounting instruction	
■ Order information	
Article number	9750501000
Number per package	1
■ Shipping data	
Gross weight	3,2 kg (7.1 lbs)
Packing dimensions	1320 x 150 x 60 mm
Harmonized Tariff Code	8421.9900.99
Country of origin	France

APPROVALS/CERTIFICATES




DIMENSIONS



	mm	inch
A	106	4.2
B	144	5.7
C	1276	50.2
D	850	33.5

CONFIGURATION

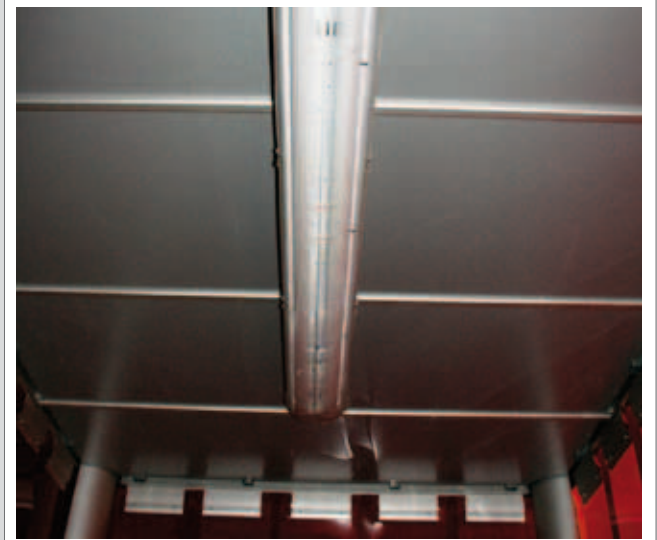

Product type

Lighting fixture

Article no.

9750501000

Product category

modular extraction hood

Version

120111/A

Always check the latest version on www.plymovent.com.