



CKC150R

The CKC150 is a heavy duty 150 Amp torch designed to withstand the rigors of industrial construction sites. With a stainless steel head insert, it's nearly impossible to damage threads. A heavy walled tube is used in the neck of the torch to reduce bending or breaking. The valved model is constructed with an o-ring style gas valve which eliminates lost or damaged gas valve knobs.




Gas Cooled
 150 amp ACHF or DCSP @ 100%
 7-3/4 in(19.6 cm) 4-1/2 oz(127 gm)

Rigid Head		25ft (7.6m)	CKC1525VN
with Valve		12.5ft (3.8m)	CKC1512VH
Stainless	1 Piece	25ft (7.6m)	CKC1525VH


**CKC150 & CKC150V RIGID (CK EXCLUSIVE)
 SUPERFLEX CABLE**

HEAD STYLE	CABLE	LENGTH	PART#
Rigid Head w/o Valve	2 Piece	12.5ft (3.8m)	CKC1512NSF
		25ft (7.6m)	CKC1525NSF
Stainless	1 Piece	12.5ft (3.8m)	CKC1512HSF
		25ft (7.6m)	CKC1525HSF
Rigid Head with Valve	2 Piece	12.5ft (3.8m)	CKC1512VNSF
		25ft (7.6m)	CKC1525VNSF
Stainless	1 Piece	12.5ft (3.8m)	CKC1512VHSF
		25ft (7.6m)	CKC1525VHSF

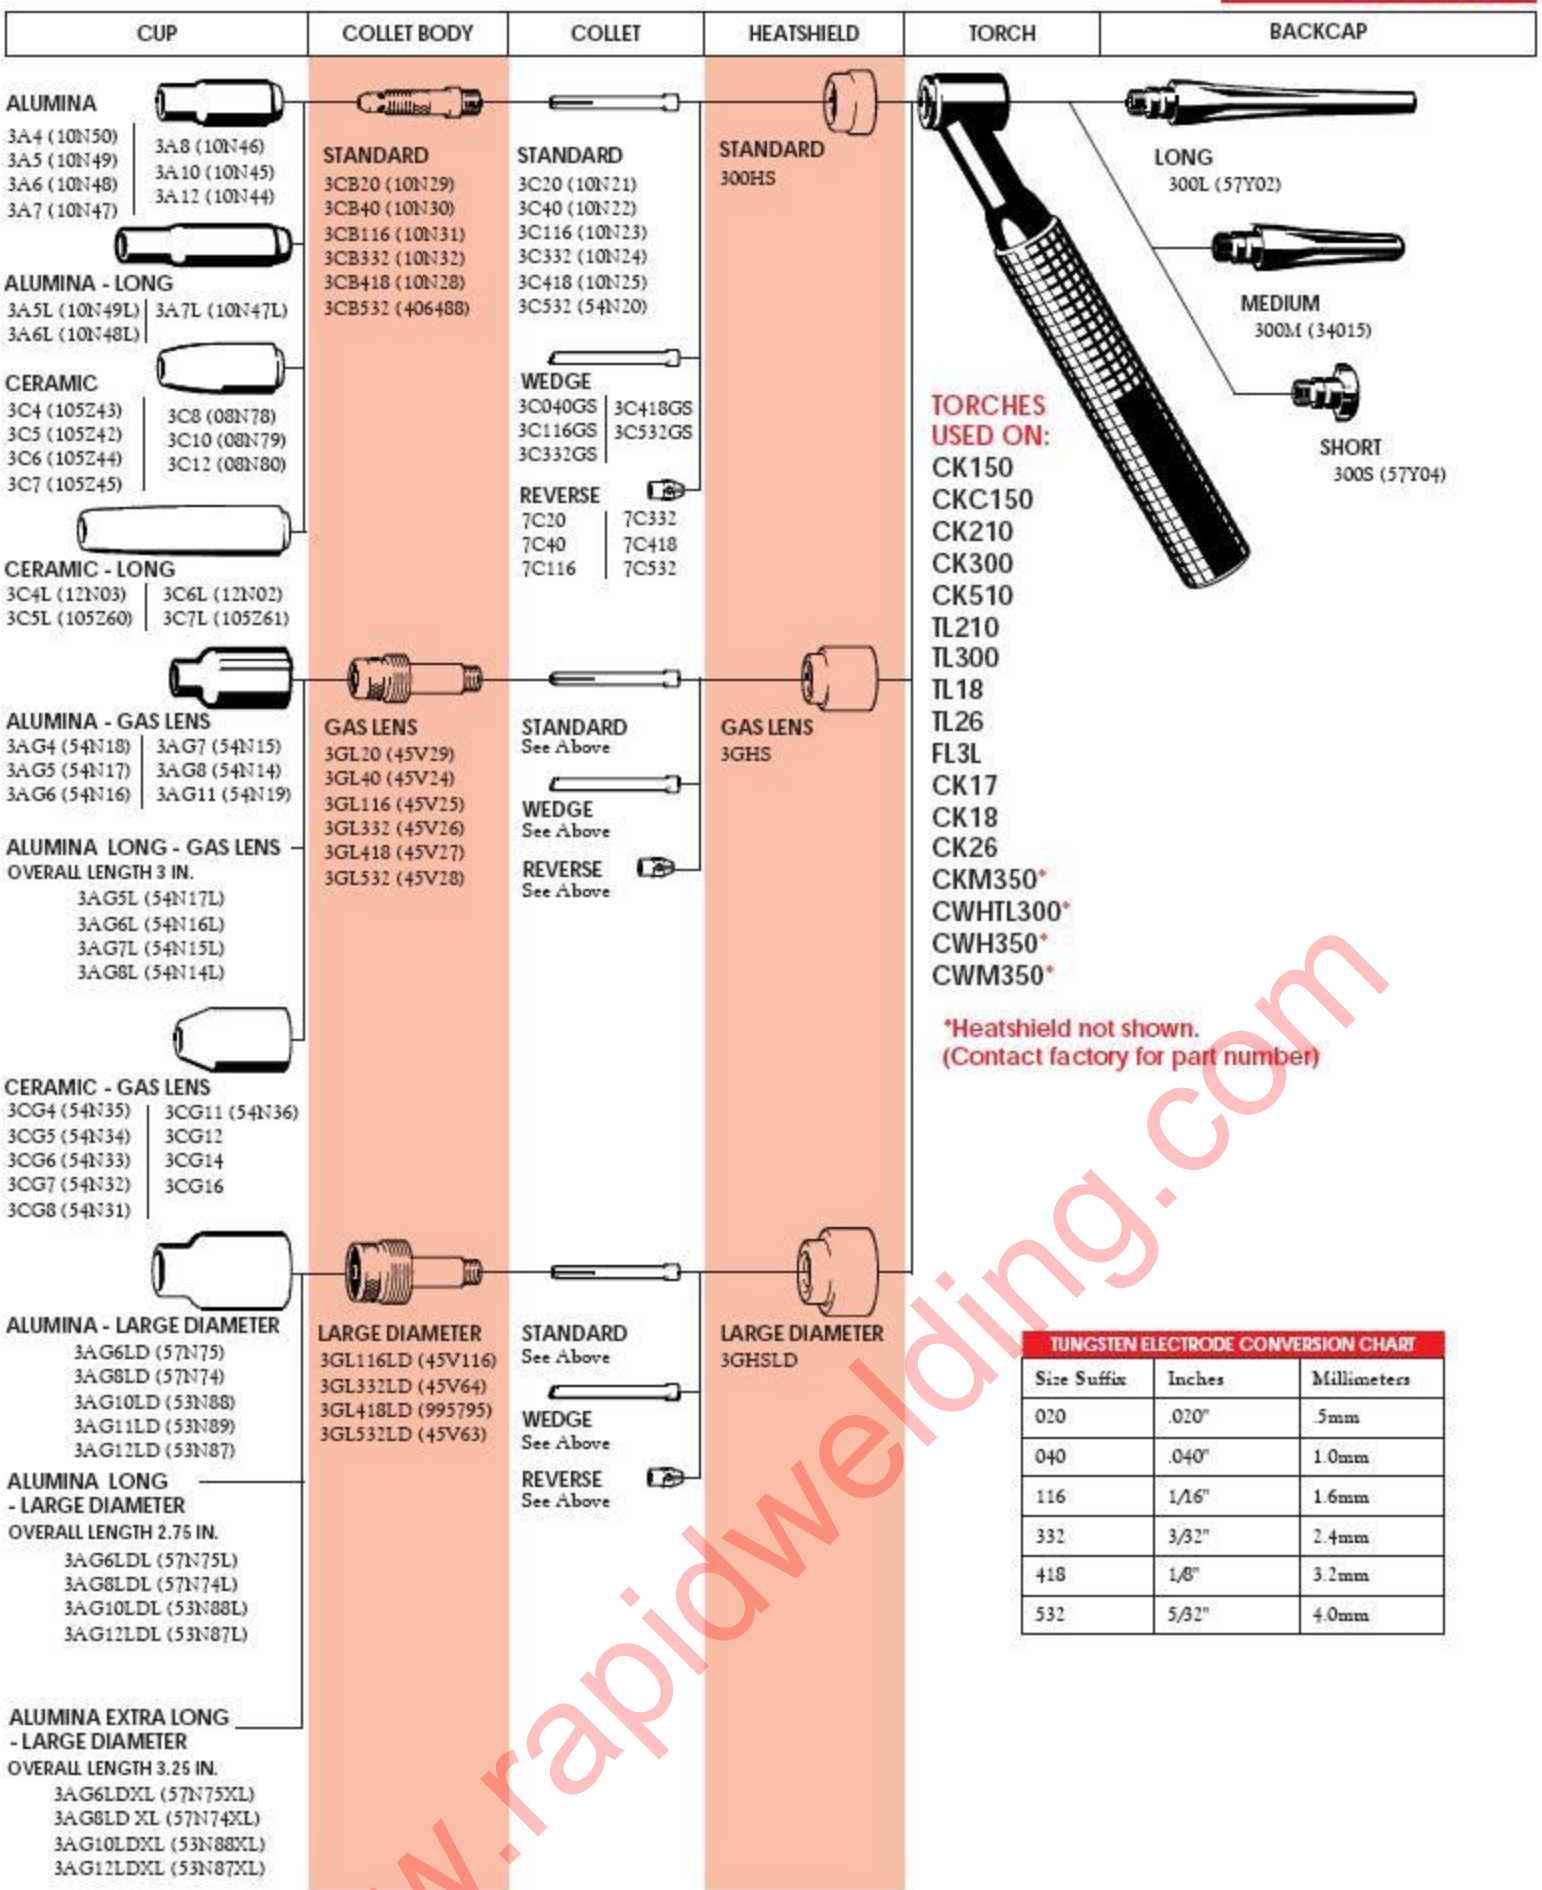

TUNGSTEN ELECTRODE CONVERSION CHART		
Size Suffix	Inches	Millimeters
020	.020"	5mm
040	.040"	1.0mm
116	1/16"	1.6mm
332	3/32"	2.4mm
418	1/8"	3.2mm
532	5/32"	4.0mm

3 SERIES GAS SAVER PARTS

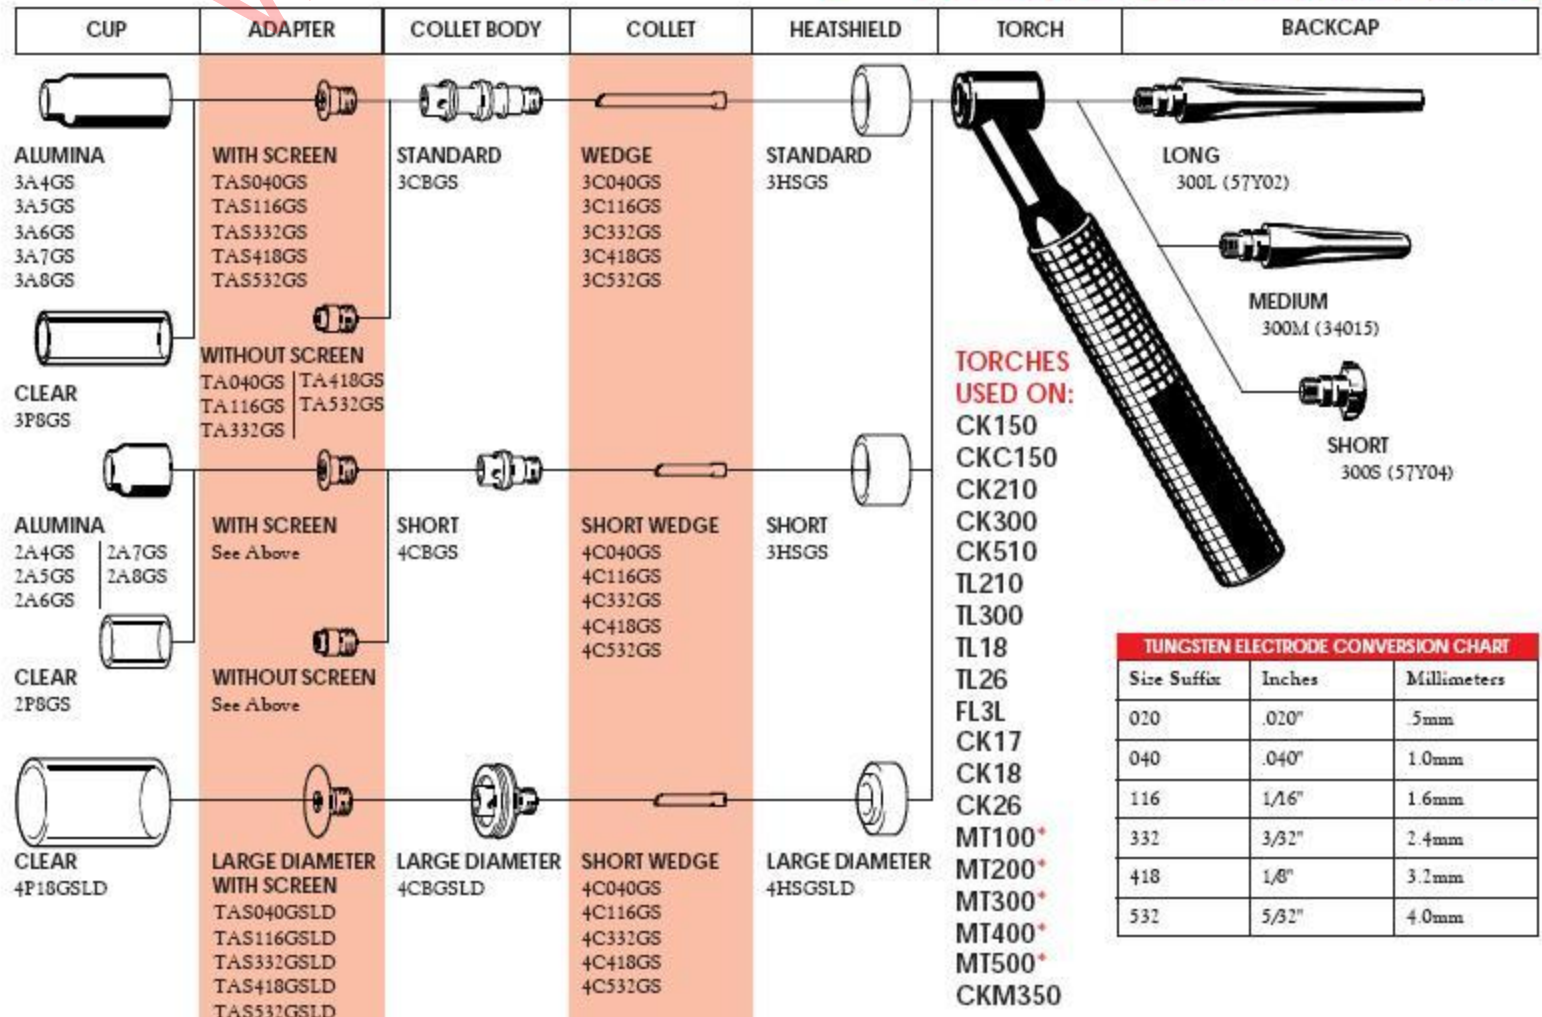

TUNGSTEN ELECTRODE CONVERSION CHART		
Size Suffix	Inches	Millimeters
020	.020"	5mm
040	.040"	1.0mm
116	1/16"	1.6mm
332	3/32"	2.4mm
418	1/8"	3.2mm
532	5/32"	4.0mm