


# EAGLE

**MANUFACTURED FROM ZA12 ALLOY ANTI-SPARK MATERIAL.**

The Eagle is perfect for use in corrosive and hazardous areas. It's fully ATEX approved to EXII 2GDC T6 IIC T85°C and has an Atlas Copco pneumatic motor for safety in hazardous areas.

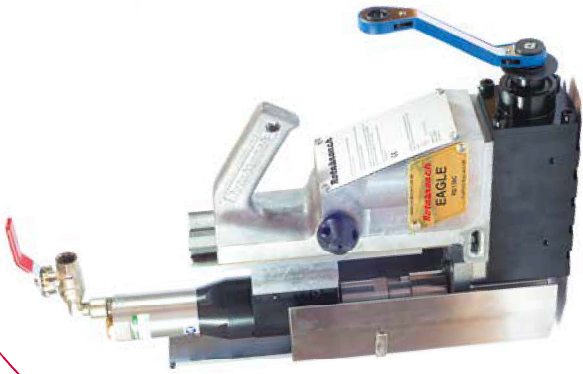

## SPECIFICATIONS

Cutter Capacity	52mm
Depth of Cut	50mm
Drill Chuck Capacity	16mm
No Load Speed	270RPM
Motor Specification	28CFM
Magnet Adhesion	7000N
Length	370mm
Height	540mm
Width	175mm
Magnet Size	165 x 80mm
Weight	21KG
Stroke	70mm

## KEY FEATURES

- CUTTER CAPACITY** 52mm
- DEPTH OF CUT** 50mm
- TWIST DRILL CAPACITY** 16mm
- WEIGHT** 21KG
- MAGNET SIZE** 165 x 80mm

## INCLUDED

- SAFETY STRAP
- HEXAGON SPANNER 4mm
- HEXAGON SPANNER 3mm
- PIPE FIXING STRAP

**PART CODE:**  
RD130C

# RAVEN

**THE RAVEN IS DESIGNED FOR USE ON PNEUMATIC SUPPLIES IN NON-CORROSIVE ATMOSPHERES.**

With a mechanically activated magnet, it is lightweight, fully ATEX approved to EXII 2GDC T6 IIC T85°C and has an Atlas Copco pneumatic motor, for safety in hazardous areas.



## SPECIFICATIONS

Cutter Capacity	52mm
Depth of Cut	50mm
No Load Speed	270RPM
Motor Specification	28CFM
Magnet Adhesion	7000N
Length	315mm
Height	540mm
Width	160mm
Magnet Size	165 x 80mm
Weight	16KG
Stroke	70mm

## KEY FEATURES

- CUTTER CAPACITY** 52mm
- DEPTH OF CUT** 50mm
- TWIST DRILL CAPACITY** 16mm
- WEIGHT** 16KG
- MAGNET SIZE** 165 x 80mm

## INCLUDED

- SAFETY STRAP
- HEXAGON SPANNER 4mm
- HEXAGON SPANNER 3mm
- PIPE FIXING STRAP

**PART CODE:**  
CM/330/C