


# Chain Clamps

## Double Jackscrew clamps for aligning & reforming pipes

### All clamps include:

- Length of chain required for the pipe range
- Double jackscrew jackbars listed for the pipe range
- Main block
- Fine adjustment
- Fitting alignment device
- Jackscrew wrench
- Parts and operating manual
- Metal Storage box
- Hi-Lo gauge

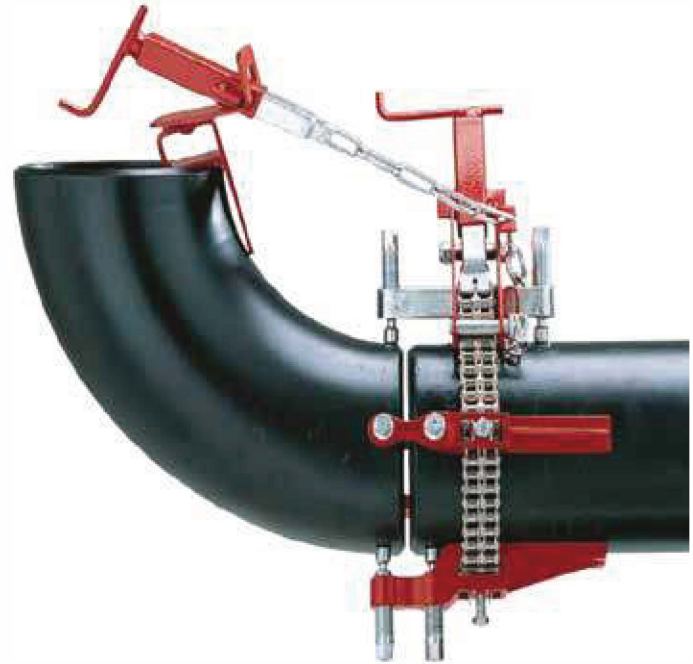

### Features and advantages:

- Alignment - can align all pipe schedules accurately.
- Reforming - jackscrews enable the elimination of 'Hi-Lo' points either side of the weld joint. Can reform up to schedule 40 pipes.
- Adaptable - one chain clamp covers the range of 8 cage clamps.
- No Tack Jackbars - joints can be fully welded without removing the clamp.
- Versatile - elbows, tees and other fittings can be accurately aligned using the Fitting Alignment Device.
- Quality - jackbars are cast from high quality steel alloys.
- Additional jackbars can be added if extra pressure is required.
- Jackscrews - Jackbars have two jackscrews with independently pivoting pads to compensate for uneven surfaces.
- Stainless Steel - available in both carbon and stainless steel versions.

| Part No. | Pipe Diameter Range "/>mm | No. Of Jackbars | Reforms Pipe to Schedule | Aligns Pipe to Schedule | Shipping WT KGS |
|----------|---------------------------|-----------------|--------------------------|-------------------------|-----------------|
| SCC12    | 1-12                      | 4               | 40                       | 80                      | 12              |
| SCC12SS  | 1-12                      | 4               | 40                       | 80                      | 12              |
| SCC20    | 4-20                      | 7               | 40                       | 80                      | 33              |
| SCC20SS  | 4-20                      | 7               | 40                       | 80                      | 33              |
| SCC36    | 10-36                     | 8               | 40                       | 80                      | 67              |
| SCC36SS  | 10-36                     | 8               | 40                       | 80                      | 67              |
| SCC54    | 10-54                     | 13              | 40                       | 80                      | 82              |
| SCC54SS  | 10-54                     | 13              | 40                       | 80                      | 82              |

GBC Chain Clamps must not be used as a lifting device.  
 Fittings must be independently supported at all times.