

# Heavy Duty & Multi-Angle Magnets

Tools for sheet metal and large stock holding.

## A-FRAME HD MAGNET

New for large and heavy stock holding.

Larger / wider magnets with large contact surface and stability. ON/OFF switches function with weaker force when lever at **mid-position**, for adjustment / placement of parts.



Part No.	Max. Pull Force TOTAL (lb)	Dimension (in)	Weight (lb)
MS2-300	265	13 x 13 x 1.3	8.8

**⚠ Must be used for tack welding only and removed before completing weld. Avoid prolonged exposure of magnetic products to heat sources of 176°F / 80°C.**

## STANDARD MAGNET SQUARES

Holding at multiple angles while soldering, brazing, and welding at 30°/60°, 45°, and 90°.

- Center hole for easy handling.
- Aluminium enclosed for easier cleaning.




**MS346C**  
Multi-Angle



**MS45**  
45°, 90°



**MS60**  
60°, 90°

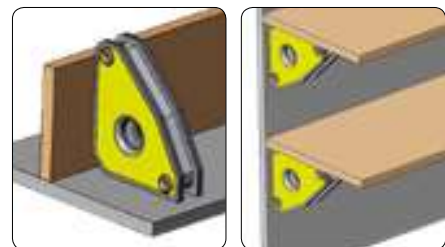

Part No.	Angles	Max. Pull Force (lb)	Dimension (in)	Weight (lb)
MS346C	30°/60°, 45°, 90°	85	4-3/8 x 3-3/4 x 7/8	1.8
MS45	45°, 90°	65	4-3/8 x 3-3/4 x 3/4	1.0
MS60	60°, 90°	55	4-3/8 x 3-3/4 x 3/4	1.0

\*Magnetic force is based on the longest side of Magnet with 3/8" thick steel.

**⚠ Must be used for tack welding only and removed before completing weld. Avoid prolonged exposure of magnetic products to heat sources of 176°F / 80°C.**